The oldest frame church to survive in Wicomico County, and one of a handful of

pre-Revolutionary War structures, is St. Paul's P. E. Church, commonly known

as Spring Hill Church. Erected between 1771 and 1773, the single-story,

rectangular frame structure was assembled by builder and master carpenter John

Hobbs, who was paid L 509 in two principal installments for his services. The

design of Spring Hill followed in the same form established at Green Hill (WI-2)

forty years earlier. Two front doors, used for segregated entrance and exit,

pierce the west gable end. Corresponding to the front doors are two aisles that

dissect the first floor into three blocks of raised-panel pews. The

interior survives with much of its original woodwork, although the center block

of pews was converted from box pews to slip pews. The pulpit, now combined

with the altar on the east wall, was originally located on the north wall.

Dominating the west end is the original gallery, supported by a neoclassical fluted

column. The walls and ceiling are covered with native yellow pine, and like the

pews, have never been painted. Also original to the 1770s structure are the

twenty-over-twenty sash windows distinguished by segmental arches headers.

Another distinctive feature to the exterior are the kicked eaves, which are finished

with a cove cornice executed in a long, hand-hewn timber.

The 1770s church is the second structure to stand in this general location.

A previous chapel, erected in the early years of the eighteenth century, was one of six congregations served by Reverend Alexander Adams, rector of Stepney Parish between 1704 and his death in 1769. The new church at Spring Hill was built under the leadership of Reverend John Scott, who, during the Revolution, was jailed as a Tory and exiled to Frederick County over the course of the war.

During the early nineteenth century, the parish was led by Reverend William Murray Stone, a native of the parish who later became Bishop of the Diocese of Maryland. He resided on a farm near Spring Hill Church (WI-22) until his death in 1838.

During the early to mid twentieth century the congregation grew and justified the construction of a parish house next to the church in 1925. During the 1950s some restoration work began with the replacement of the floor and the construction of a small addition on the east end to house the mechanical system. The two-door front was restored in 1973 on the occasion of its two-hundred year anniversary.

MARYLAND HISTORIC PRESERVATION PLAN INFORMATION

RESOURCE NAME:___Spring Hill Church_____

MHT INVENTORY NUMBER:___WI-6_____

MARYLAND COMPREHENSIVE PLAN DATA

1. Historic Period Theme(s):   Architecture
Religion

2. Geographic Orientation: Eastern Shore

3. Chronological/Development Period(s):

   Rural Agrarian Intensification
1680-1815

   Agricultural-Industrial Transition
1815-1870

4. Resource Type(s):   Church
Cemetery

**Maryland Historical Trust
State Historic Sites Inventory Form**

MARYLAND INVENTORY OF
HISTORIC PROPERTIES

1. Name (indicate preferred name)

historic Spring Hill Church   St. Paul's P. E. Church

and/or common

2. Location

street & number US Route 50 and Memory Garden Lane   ___ **not for publication**

city, town Hebron   _X_ **vicinity of**   **congressional district** First

state Maryland   **county** Wicomico

3. Classification

Category	Ownership	Status	Present Use	
_X_ district	_X_ public	_X_ occupied	___ agriculture	___ museum
_X_ building(s)	_X_ private	___ unoccupied	___ commercial	___ park
___ structure	___ both	___ work in progress	___ educational	___ private residence
___ site	**Public Acquisition**	**Accessible**	___ entertainment	_x_ religious
___ object	___ in process	_X_ yes: restricted	___ government	___ scientific
	___ being considered	___ yes: unrestricted	___ industrial	___ transportation
	_x_ not applicable	___ no	___ military	___ other:

4. Owner of Property (give names and mailing addresses of all owners)

name Vestry of St. Paul's P. E. Church c/o of George Winfree

street & number   telephone no.:

city, town Hebron   **state and zip code** MD   21830

5. Location of Legal Description

courthouse, registry of deeds, etc. Wicomico County Clerk of Court   liber

street & number Wicomico County Courthouse   folio

city, town Salisbury   **state** MD   21801

6. Representation in Existing Historical Surveys

title Maryland Inventory of Historic Properties

date 1968   ___ **federal** _X_ **state** ___ **county** ___ **local**

depository for survey records Maryland Historical Trust

city, town Crownsville   **state** MD   21032

Prepare both a summary paragraph and a general description of the resource and its various elements as it exists today.

Spring Hill Church, formally known as St. Paul's P. E. Church, is located at the intersection of US Route 50 and Memory Garden Lane northeast of Hebron, Wicomico County, Maryland. The single-story, rectangular frame church faces west with the gable roof oriented on an east/west axis.

Built between 1771 and 1773, the single-story gable-front frame church is supported on a low brick foundation and the exterior is sheathed with vinyl siding over plain weatherboards. The medium pitched gable roof is covered with asphalt shingles. Joining the church on the property is a single-story gable front frame parish house erected in 1925 as well as a small cemetery in the front yard. Another cemetery, located on the opposite side of the road, is known as the "Fowler plot."

The west (main) elevation is a symmetrical two-bay facade with two doors marking the first floor. These doors were restored to their original positions in 1973. The gable end is pierced by a pair of twelve-over-twelve sash windows flanked by board-and-batten shutters. Fixed between the windows is a large plaque that identifies the church and its construction date. The gable end is finished with a stepped nineteenth century molding that has been covered with vinyl as well. Fixed atop the roof is a cross.

The north and south sides are essentially alike with four twenty-over-twenty sash windows evenly spaced across each wall. Each window opening has an arched header and board-and-batten shutters. All of the woodwork, aside from the sash, has been covered with vinyl. Finishing the base of the roof is a cove cornice covered with vinyl as well. The cornice was hewn from a single timber with the curved profile.

The east gable end is pierced by a pair of twenty-over-twenty sash windows on each side of the 1950s gable roof addition. The end of the roof is finished with a stepped bargeboard.

The interior survives with a large percentage of its original 1770s woodwork, including raised-panel pew partitions, gallery, altar railing and pulpit back with canopy. The pulpit was originally located on the north wall between the second and third windows, but was moved to the east wall and joined with the altar. The altar has been raised on a higher platform, but the railing is original to the 1770s church. Turned posts anchor each corner, and rows of turned balusters are fitted between a molded upper and lower railing. The altar railing as well as the pulpit are executed in native yellow pine.

8. Significance

eriod

Areas of Significance—Check and justify below

Period	Areas of Significance			
___ prehistoric	___ archeology-prehistoric	___ community planning	___ landscape architecture	_X_ religion
___ 1400–1499	___ archeology-historic	___ conservation	___ law	___ science
___ 1500–1599	___ agriculture	___ economics	___ literature	___ sculpture
___ 1600–1699	_X_ architecture	___ education	___ military	___ social/
_x_ 1700–1799	___ art	___ engineering	___ music	humanitarian
___ 1800–1899	___ commerce	___ exploration/settlement	___ philosophy	___ theater
___ 1900–	___ communications	___ industry	___ politics/government	___ transportation
		___ invention		___ other (specify)

Specific dates 1771-73   **Builder/Architect** John Hobbs, builder

check: Applicable Criteria: __A __B X_C __D
          and/or
          Applicable Exception: __A __B __C __D __E __F __G

          Level of Significance: __national __state X_local

Prepare both a summary paragraph of significance and a general statement of history and support.

The oldest frame church to survive in Wicomico County, and one of a handful of pre-Revolutionary War structures, is St. Paul's P. E. Church, commonly known as Spring Hill Church. Erected between 1771 and 1773, the single-story, rectangular frame structure was assembled by builder and master carpenter John Hobbs, who was paid L 509 in two principal installments for his services.[1] The design of Spring Hill followed in the same form established at Green Hill (WI-2) forty years earlier. Two front doors, used for segregated entrance and exit, pierce the west gable end. Corresponding to the front doors are two aisles that dissect the first floor into three blocks of raised-panel pews. The interior survives with much of its original woodwork, although the center block of pews was converted from box pews to slip pews. The pulpit, now combined with the altar on the east wall, was originally located on the north wall. Dominating the west end is the original gallery, supported by a neoclassical fluted column. The walls and ceiling are covered with native yellow pine, and like the pews, have never been painted. Also original to the 1770s structure are the twenty-over-twenty sash windows distinguished by segmental arches headers. Another distinctive feature to the exterior are the kicked eaves, which are finished with a cove cornice executed in a long, hand-hewn timber.

The 1770s church is the second structure to stand in this general location. A previous chapel, erected in the early years of the eighteenth century, was one of six congregations served by Reverend Alexander Adams, rector of Stepney Parish between 1704 and his death in 1769. The new church at Spring Hill was built under the leadership of Reverend John Scott, who, during the Revolution, was jailed as a Tory and exiled to Frederick County over the course of the war.

During the early nineteenth century, the parish was led by Reverend William Murray Stone, a native of the parish who later became Bishop of the Diocese of Maryland. He resided on a farm near Spring Hill Church (WI-22) until his death in 1838.

---

[1] Virginia MacElrath Dick, "Old Spring Hill Church," Salisbury, 1973, p. 9.

10. Geographical Data

Acreage of nominated property _____

Quadrangle name _____　　　　　　**Quadrangle scale** _____

UTM References　do NOT complete UTM references

A | | | | | | | | | | | | | | | | | | | | | | |
　Zone　Easting　　　　　Northing

B | | | | | | | | | | | | | | | | | | | | | | |
　Zone　Easting　　　　　Northing

C | | | | | | | | | | | | | | | | | | | | |

D | | | | | | | | | | | | | | | | | | | | |

E | | | | | | | | | | | | | | | | | | | | |

F | | | | | | | | | | | | | | | | | | | | |

G | | | | | | | | | | | | | | | | | | | | |

H | | | | | | | | | | | | | | | | | | | | |

Verbal boundary description and justification

List all states and counties for properties overlapping state or county boundaries

state	code	county	code
state	code	county	code

11. Form Prepared By

name/title　Paul B. Touart, Architectural Historian

organization　Private Consultant　　　　　　**date**　4/25/99

street & number　P. O. Box 5　　　　　　**telephone**　410-651-1094

city or town　Westover　　　　　　**state**　Maryland　21871

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.

The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to:　Maryland Historical Trust
　　　　　　Shaw House
　　　　　　21 State Circle
　　　　　　Annapolis, Maryland 21401
　　　　　　(301) 269-2438

MARYLAND HISTORICAL TRUST
DHCP/DHCD
100 COMMUNITY PLACE
CROWNSVILLE, MD 21032
514-7000

PS-2746

8.1 SIGNIFICANCE
Spring Hill Church, WI-6
Hebron vicinity, Wicomico County, Maryland

During the early to mid twentieth century the congregation grew and justified the construction of a Parish House next to the church in 1925. During the 1950s some restoration work was begun with the replacement of the floor and the construction of a small addition on the east gable end that houses the mechanical system. The two-door west front was restored in 1973.

Spring Hill Church is one of the most significant churches surviving in Wicomico County, and it is worthy of listing on the National Register of Historic Places.

Form 10-300
(Rev. 6-72)

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

STATE

Maryland

COUNTY

Wicomico

FOR NPS USE ONLY

ENTRY DATE

NATIONAL REGISTER OF HISTORIC PLACES
INVENTORY -- NOMINATION FORM

(Type all entries - complete applicable sections)

1. NAME

COMMON:

Spring Hill Church

AND OR HISTORIC:

St. Paul's Episcopal Church

2. LOCATION

STREET AND NUMBER:

North side of U.S. 50 at Md. 347, one mile N.E. of Hebron

CITY OR TOWN:

Hebron

CONGRESSIONAL DISTRICT:

First

STATE	CODE	COUNTY:	CODE
Maryland	24	Wicomico	045

3. CLASSIFICATION

CATEGORY (Check One)	OWNERSHIP	STATUS	ACCESSIBLE TO THE PUBLIC
☐ District ☒ Building ☐ Site ☐ Structure ☐ Object	☐ Public ☒ Private ☐ Both Public Acquisition: ☐ In Process ☐ Being Considered	☒ Occupied ☐ Unoccupied ☐ Preservation work in progress	Yes: ☒ Restricted ☐ Unrestricted ☐ No

PRESENT USE *(Check One or More as Appropriate)*

☐ Agricultural   ☐ Government   ☐ Park   ☐ Transportation   ☐ Comments
☐ Commercial   ☐ Industrial   ☐ Private Residence   ☐ Other *(Specify)*
☐ Educational   ☐ Military   ☒ Religious
☐ Entertainment   ☐ Museum   ☐ Scientific

4. OWNER OF PROPERTY

OWNER'S NAME:

Vestry of St. Paul's Episcopal Church

STREET AND NUMBER:

CITY OR TOWN:

Hebron

STATE:	CODE
Maryland	24

5. LOCATION OF LEGAL DESCRIPTION

COURTHOUSE, REGISTRY OF DEEDS, ETC:

Wicomico County Courthouse

STREET AND NUMBER:

CITY OR TOWN:

Salisbury

STATE	CODE
Maryland	24

6. REPRESENTATION IN EXISTING SURVEYS

TITLE OF SURVEY:

DATE OF SURVEY: ☐ Federal   ☐ State   ☐ County   ☐ Local

DEPOSITORY FOR SURVEY RECORDS:

STREET AND NUMBER:

CITY OR TOWN: STATE: CODE

7. DESCRIPTION

DESCRIBE THE PRESENT AND ORIGINAL (If known) PHYSICAL APPEARANCE

Spring Hill Church, or St. Paul's Episcopal Church, is located on the north side of U.S. 50 at the intersection with Md. 347 approximately one mile northeast of Hebron. This one-story church strongly resembles Green Hill Church, located eight miles south on the Wicomico River. Spring Hill is a white frame structure two bays wide and four deep and is set on a brick foundation laid in Flemish bond with glazed headers.

The west end has two double doors, restored in 1972. Each door has four panels and large strap hinges. Above the doors in the gable are two, twelve over twelve windows with green batten shutters. Between these windows is a sign which reads "St. Paul's Episcopal Church 1773."

The east end has one segmental arch window, twenty over twenty light with green batten shutters, in each bay. Between these two windows is a small projecting pavilion with a door in the center and a segmental arch window, twelve over twelve sash, on the north and south sides. The slope of the gable roof echoes that of the church itself.

Both the north and south sides have four segmental arch windows, twenty over twenty sash, with green batten shutters. A wood, cove cornice extends along the roof on both sides.

The interior woodwork is unpainted cedar. There is a barrel vault ceiling and three large beams, with beaded edges one in each gable end. In the center of the north and south sides there is evidence that a narrow chimney stack has been removed. There are two aisles with pews through the center and along both side walls. The closed box pews are paneled. The side pews have benches on three sides of the boxes while the center pews have benches on only one side. There are plain rectangular frames around the segmental arch windows. In the southwest corner a winding stairway rises to the gallery which extends across the west end of the church. The gallery is supported in the center by a square, fluted column with a plain pedestal and entablature. The pews in the gallery are rather crude compared with those on the main floor. They have benches along two sides, perpendicular to the gallery rail.

Spring Hill Church is an active parish.

8. SIGNIFICANCE

PERIOD (Check One or More as Appropriate)

☐ Pre-Columbian   ☐ 16th Century   ☒ 18th Century   ☐ 20th Century
☐ 15th Century   ☐ 17th Century   ☐ 19th Century

SPECIFIC DATE(S) (If Applicable and Known)   1773

AREAS OF SIGNIFICANCE   (Check One or More as Appropriate)

Aboriginal
☐ Prehistoric
☐ Historic
☐ Agriculture
☒ Architecture
☐ Art
☐ Commerce
☐ Communications
☐ Conservation

☐ Education
☐ Engineering
☐ Industry
☐ Invention
☐ Landscape
　　Architecture
☐ Literature
☐ Military
☐ Music

☐ Political
☒ Religion/Phi.
　　losophy
☐ Science
☐ Sculpture
☐ Social/Human-
　　itarian
☐ Theater
☐ Transportation

☐ Urban Planning
☐ Other (Specify)

STATEMENT OF SIGNIFICANCE

Spring Hill Church (also known as Old Spring Hill and St. Paul's Episcopal Church) is an architecturally significant building because it exhibits many of the structural features which were typical of Maryland's eighteenth century country churches and because its interior woodwork is original. H. Chandlee Forman, in Maryland Architecture,[1] states that the walls of the early country churches were often timber-framed, with an overlay of weatherboarding. Floor plans were usually rectangular, and the overall exterior appearance was barn-like. The interior space on either side of the main aisle (or aisles) was divided into box stalls, with a pulpit to one side.[2] The barrel vault type of ceiling was popular, and interiors were painted white or left unpainted, as was done at Spring Hill. "...the Maryland church of this era was plain, simple, and barn-like, except for rare examples...It was the product more of utility and function than of an essay to adorn the Christian religion by impressive baroque or baronial monuments and decoration."[3]

[1] H. Chandlee Forman, Maryland Architecture. (Cambridge: Tidewater Publishers, 1968) p. 45.
[2] "It was not until a new floor was laid in 1956 that evidence was uncovered which indicated that a high pulpit had originally been in the center of the east side wall." From Virginia M. Dick, Old Spring Hill Church. (Salisbury: Charlie's Print Shop, 1973) p. 3.
[3] H. Chandlee Forman, Maryland Architecture. (Cambridge: Tidewater Publishers, 1968) p. 46.

Form 10-300a
(July 1969)

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES

INVENTORY - NOMINATION FORM

(Continuation Sheet)   #1

(Number all entries)

STATE
Maryland
COUNTY
Wicomico

WI-6

FOR NPS USE ONLY

ENTRY NUMBER | DATE

Spring Hill Church

8.   SIGNIFICANCE, continued

The history of the establishment of Spring Hill Church illustrates the close church-state relationship which existed in the Province of Maryland before the Revolution. In 1692 the Maryland Assembly issued "An Act of the Service of Almighty God and the Establishment of the Protestant Revolution in the Province,"[4] which made the Church of England the Established Church in Maryland, provided for the laying out of parishes and the election of vestries in each parish, and set up a taxation system to provide financial support for the Church. The Act further provided for the erection of parish churches and chapels of ease wherever they were needed.

Soon after the passage of the Act of 1692 Justices of the Peace and a number of Freeholders from each Hundred met in the Somerset County Courthouse and divided the County into four parishes: Stepney, Coventry, Somerset, and Snow Hill.

Green Hill Church, on the Wicomico River, was erected about 1694 and became the parish church of Stepney Parish. Three chapels of ease were built soon after, for the convenience of settlers who had moved into virgin territory. One of these was Spring Hill, situated on Rewastico Creek and erected on a tract called Spring Hill, patented by Colonel Francis Jenkins.

The erection date of the original building is uncertain, but the Somerset County records for March of 1725 refer to the appointment of John Hoffington to be overseer of the road above Spring Hill Chapel, and in 1733 Thomas Covington was appointed overseer of the roads from Cyprus Bridge to the Chapel at Spring Hill.[5]

In 1768 the Vestry of Green Hill Church petitioned the General Assembly to pass an Act to rebuild the two chapels of ease, "... their chapel of ease known by the name of Spring Hill Chapel is in a ruinous condition and unfit to be repaired."[6]

[4]The Protestant Revolution in Maryland was part of the movement which brought about the dethronement of the Catholic House of Stuart in England, making possible the Protestant succession of William and Mary. Lord Baltimore's Catholicism was used against him by his enemies and Maryland became a Royal Province, under the Crown, instead of a Proprietary Colony under Lord Baltimore. Clayton Torrence, Old Somerset on the Eastern Shore of Maryland. (Baltimore: Regional Publishing Company 1966), p. 150.

[5]Clayton, Torrence, Old Somerset on the Eastern Shore of Maryland. (Baltimore: Regional Publishing Company, 1966)p.189.

[6]Virginia M. Dick. Old Spring Hill Church (Salisbury: Charlie's Print Shop, 1973) p. 8

GPO 521-724

Form 10 300a
(Jul, 1969)

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

NATIONAL REGISTER OF HISTORIC PLACES

INVENTORY - NOMINATION FORM

(Continuation Sheet) #2

STATE
Maryland   WI-6

COUNTY
Wicomico

FOR NPS USE ONLY

ENTRY NUMBER   DATE

(Number all entries)

Spring Hill Church

8.   SIGNIFICANCE, continued

The Assembly authorized the vestry to purchase two acres close to the existing chapel and to erect a new building. Six thousand pounds of tobacco was levied for the rebuilding, and the existing structure was completed in 1773.

An entry in the Stepney Parish Vestry ledger for the years 1768 to 1775 records that the inhabitants of Stepney Parish on January 8, 1771, paid "to John Hobbs for building Spring-hill Chapple £509, one half of which to be paid this year." [7]

In 1780 Stepney Parish became a part of the Diocese of Maryland in the newly formed Protestant Church of America, with Thomas Clagett appointed the first Bishop of Maryland. In 1827 the parish was divided, part of it becoming Spring Hill Parish, with the Spring Hill Chapel becoming the parish church. And in 1867, when Wicomico County was erected from portions of Somerset and Worcester counties, Spring Hill Church became part of the new county.

A Maryland Historical Society Marker near the Church reads: "Old Spring Hill, St. Paul's Church. Established here between 1711 and 1725 as a chapel of ease for Green Hill Church (1694) located 8 miles south on the Wicomico River. The present edifice was completed in 1773 to replace the original structure. Some of the original furnishings are still in use."

---

[7] Stepney Parish Vestry Ledger, 1768-1775. Hall of Records, Annapolis, Maryland.

9. MAJOR BIBLIOGRAPHICAL REFERENCES

Dashiell, Cassius M. "History of Stepney Parish." Unpublished
    manuscript, 1892.
Dick, Virginia M. Old Spring Hill Church. Salisbury: Charlie's
    Print Shop, 1973.
Forman, H. Chandlee. Maryland Architecture. Cambridge:
    Tidewater Publishers, 1968.
Stepney Parish Vestry Ledger, 1768-1775. Hall of Records,
    Annapolis, Maryland.
Torrence, Clayton. Old Somerset on the Eastern Shore of Maryland.
    Baltimore: Regional Publishing Company, 1966.

10. GEOGRAPHICAL DATA

	LATITUDE AND LONGITUDE COORDINATES DEFINING A RECTANGLE LOCATING THE PROPERTY					O R	LATITUDE AND LONGITUDE COORDINATES DEFINING THE CENTER POINT OF A PROPERTY OF LESS THAN TEN ACRES					
CORNER	LATITUDE			LONGITUDE			LATITUDE			LONGITUDE		
	Degrees	Minutes	Seconds	Degrees	Minutes	Seconds	Degrees	Minutes	Seconds	Degrees	Minutes	Seconds
NW	°	'	"	°	'	"	38°	25'	45"	75°	40'	27"
NE	°	'	"	°	'	"						
SE	°	'	"	°	'	"						
SW	°	'	"	°	'	"						

APPROXIMATE ACREAGE OF NOMINATED PROPERTY: 5 acres

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE:	CODE	COUNTY	CODE
STATE:	CODE	COUNTY:	CODE
STATE:	CODE	COUNTY:	CODE
STATE:	CODE	COUNTY:	CODE

11. FORM PREPARED BY

NAME AND TITLE:

Ann E. Hill, Summer Intern; Lois Snyderman, Research Assistant

ORGANIZATION	DATE
Maryland Historical Trust	July, 1974

STREET AND NUMBER:

2525 Riva Road

CITY OR TOWN:	STATE	CODE
Annapolis	Maryland	24

12. STATE LIAISON OFFICER CERTIFICATION

As the designated State Liaison Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the National Park Service. The recommended level of significance of this nomination is:

National ☐   State ☐   Local ☐

Name _____

Arthur C. Townsend

Title State Historic   Preservation
Officer

Date April 18, 1975

NATIONAL REGISTER VERIFICATION

I hereby certify that this property is included in the National Register.

_____
Director, Office of Archeology and Historic Preservation

Date _____

ATTEST:

_____
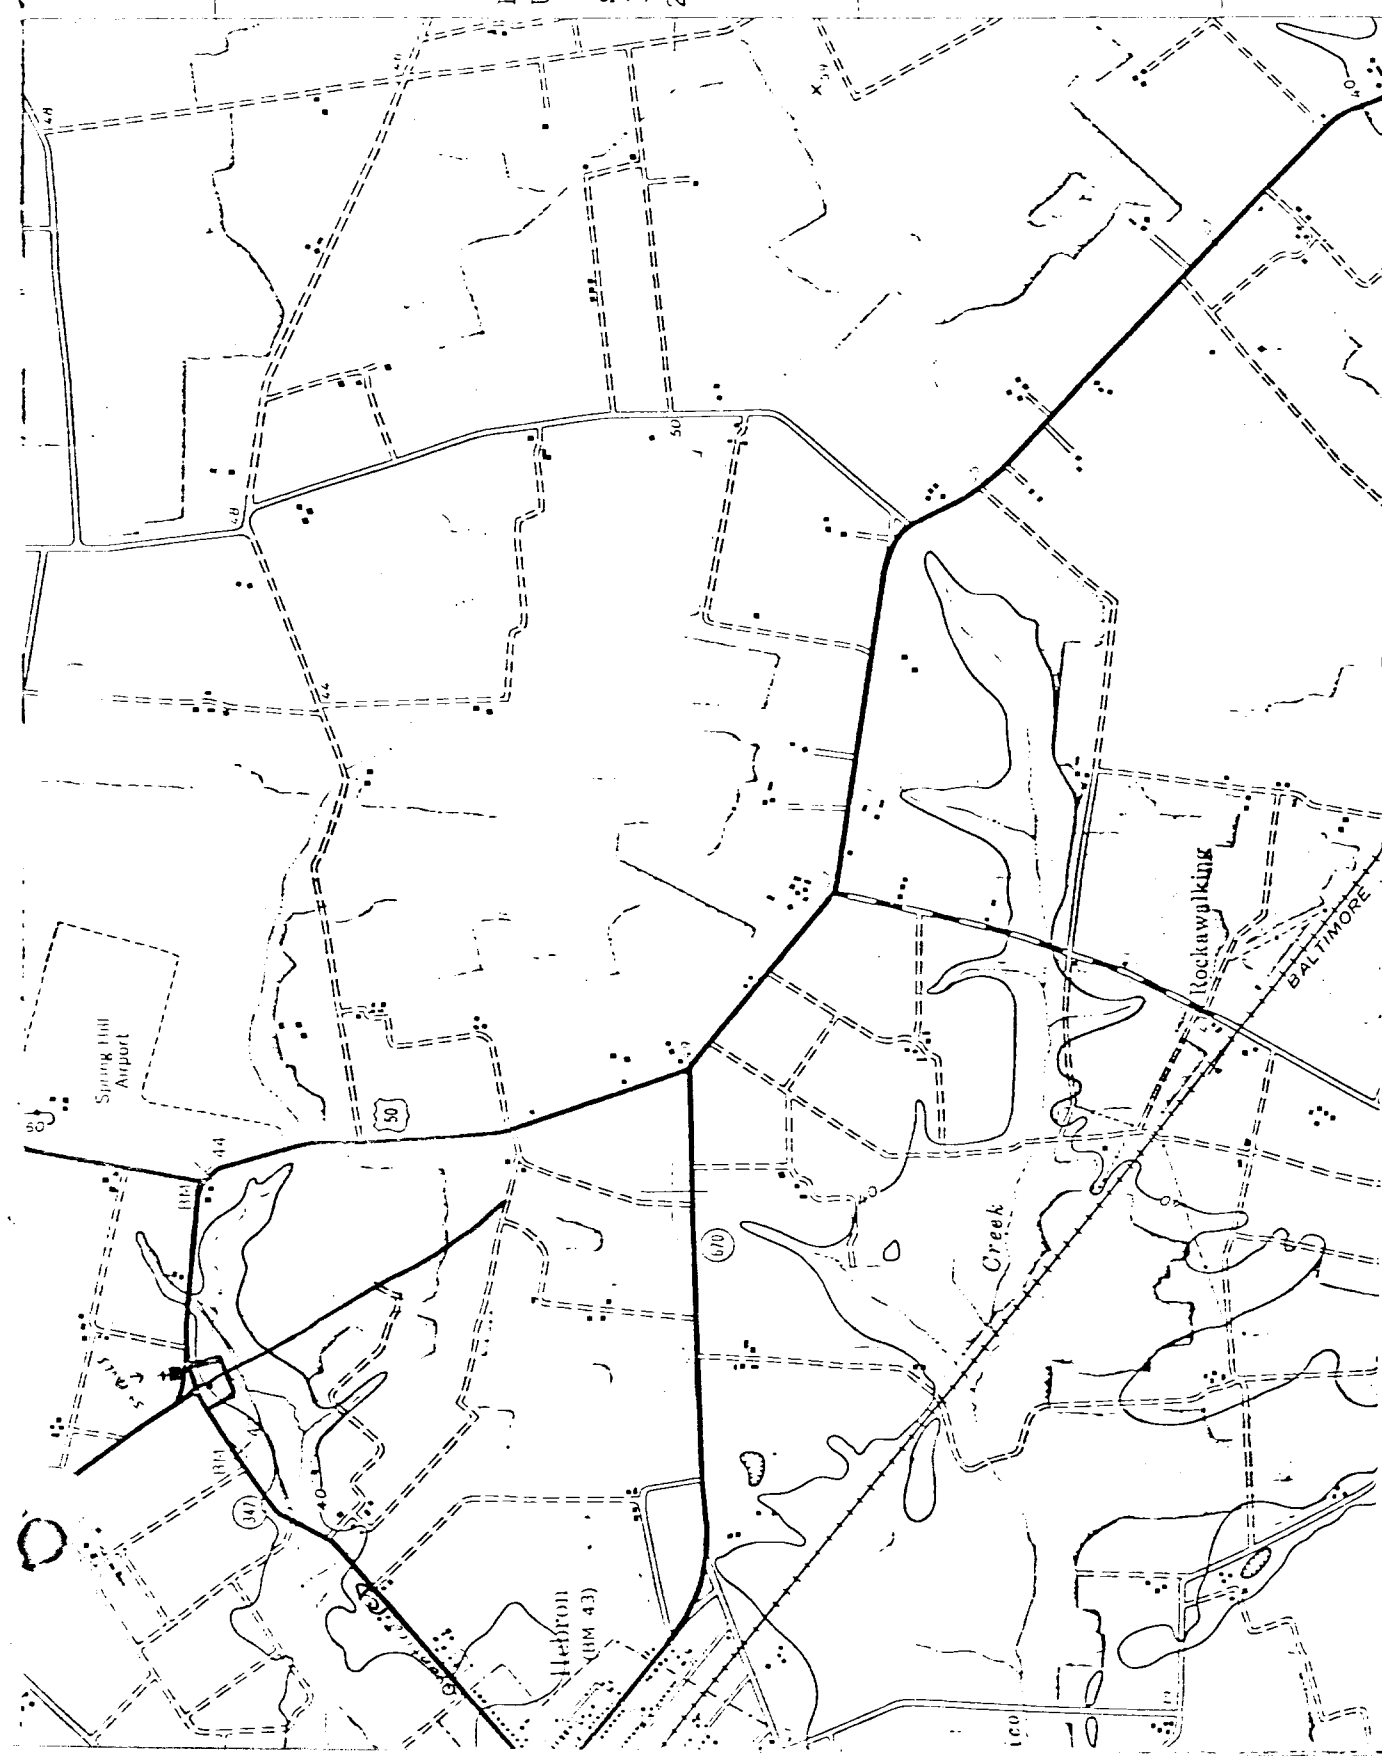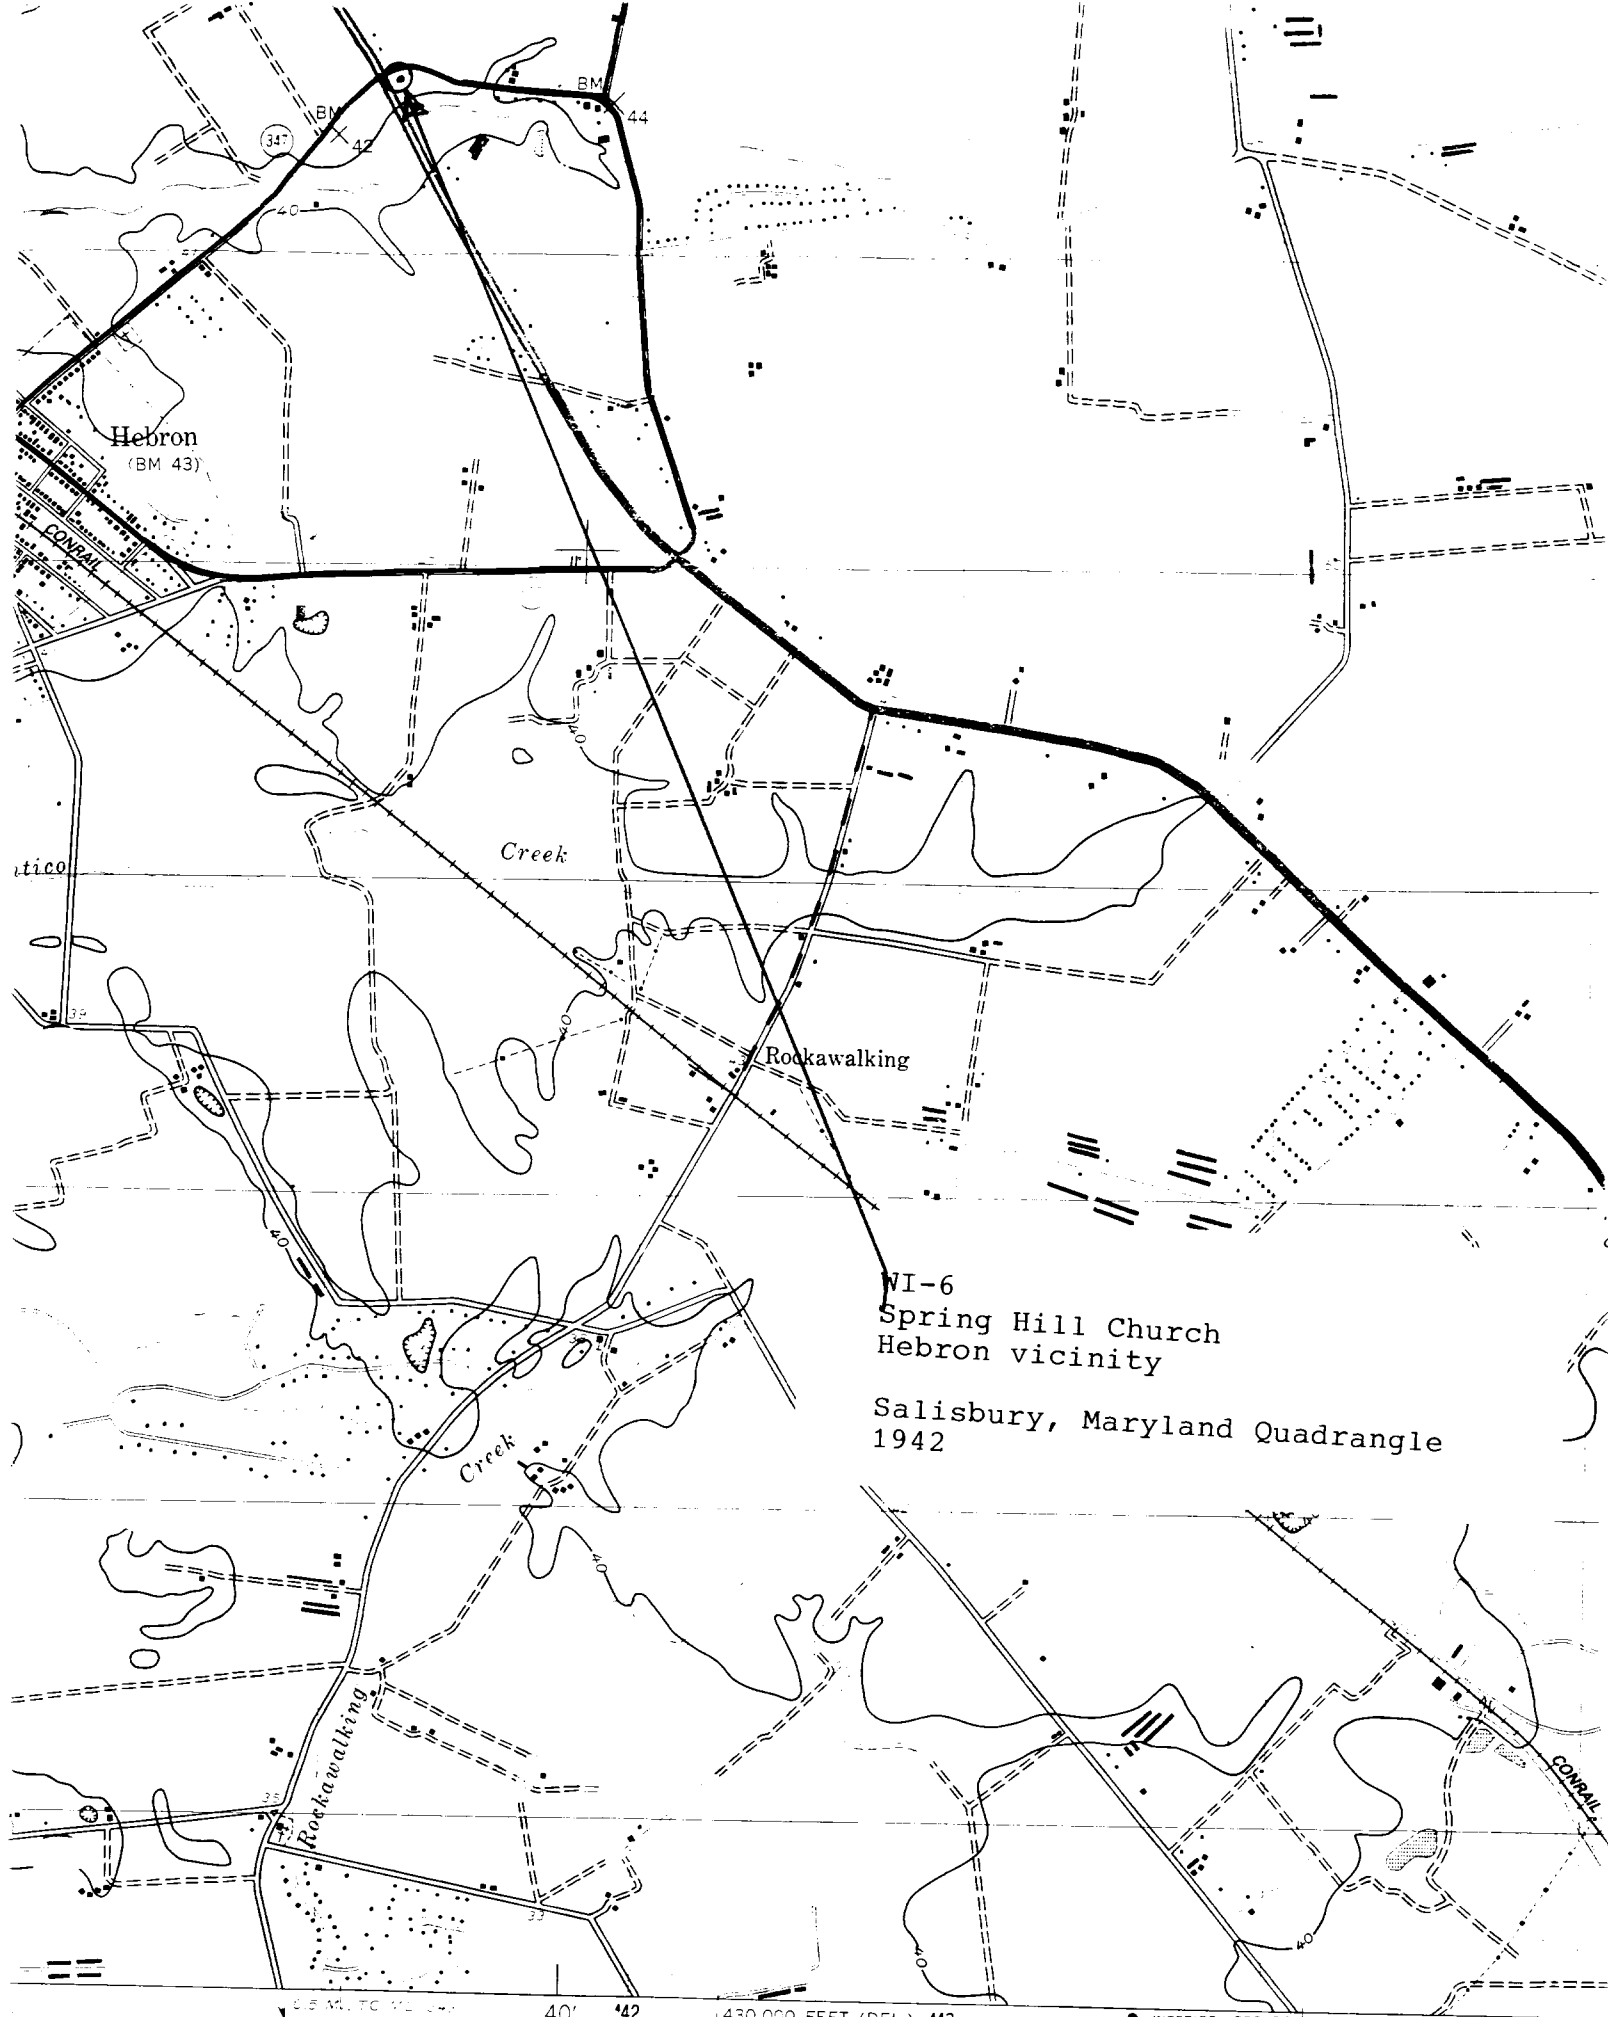Keeper of The National Register

Date _____

WI-6

Spring Hill Church

lat 38° 25' 45"
long 75° 40' 27"

HEBRON QUADRANGLE
U.S.G.S. 7.5 minute map
scale 1:24000
1942
25'

Spring Hill
Airport

U.S. 50

44

Hebron
(BM 43)

Rockawalking

BALTIMORE

Creek

K

Store & P.O.

R.P.Darby

RIVERTON P.O.

Cranary

Wh[...]

A.Taylor

Geo.T.Ken[...]

R.P.Darby

J.Kenner

R.D.Howard

T.W.Walker

O.Bailey

Jno.B.Taylor

J.E.[...]

A.H.& T.W.Bradley

A.Graham

B.R.Gravenor

A.Phillips

R.P.Darby

School N°3

367

371

W.T.Gravenor

B.T.Gravenor

Church

B.T.Gravenor

Owen

A.R.Wright

Thos.Conoway Chapel

Jno.B.Taylor

Res.

J.N.Bennett

C.W.English

C.W.English

A.H.Bradley

Wm.Russell

Creek

H.Wright

Shockley Est.

T.Wright

Res.

L.W.Wright

School N°1

Grim[...]

T.L.English

J.W.Bradley

B.P.Gravenor

C.Shockley

T.Shockley

W.A.Bradley

Res.

850

Wm.T.English

A.H.Bradley

B.A.Wright

Res.

F.T.Bennett

J.J.Bennett

W.H.Bradley

Res.

A.English

Wm.W.Bennett

Res.

P.T.A.Venables

Mrs.Shockley

Wm.Brown

Wm.Bennett

L.J.Howard

A.B.Howard

Res.

L.Cooper

A.C.Russell

Res.

Benj.Bradley

Wm.Owens

N.Dashiell

T.B.Taylor

O.Darby

Jos.Bratton

J.Bailey

L.H.Cooper

E.W.Taylor

J.Howard

A.M.Bounds

T.A.Bounds

G.Venables

P.Collier

R.Taylor

J.B.Bacon

Jos.Bratton

Res.

254

J.H.Bacon & Co.

Z.Phillips

253

Jos.P.Twilley

School N°5

Est.of J.English

G.Waller

T.Humphreys

J.H.Bacon

BARREN CREEK

Barren Creek Spring P.O.

J.Bratton

Pres.Ch.

Barren Creek Spring

Wm.Venables

Wm.G.Holmes

G.Mill

G.Mill

S.Mill

C.M.Wright

708

T.L.Jackson

S.Dashiell

T.A.Bacon

Wm.F.Wilson

J.E.Bacon

S.Ollis

Wm.Bennett

S.Mill

Bennett & Wilson

Res.

Res.

A.R.Howard

I.J.Wright & Bro

Barren Creek

L.H.Wilson

S.McAllister

Mrs.Bradley

G.Johnson

Wm.F.Wilson

Res.

Jno.Howard

S.Mill

I.J.Phillips

Mrs.S.Phillips

S.B.Phillips

G.Mill

S.Mill

S.McAllister

W.Taylor

T.Seabreeze

Wm.Pollitt

J.Howard

L.T.Wilson

Thos.Wilson

Wm.Howard

E.M.Waller

Store

J.H.P.Elliott

Res.

191

Covington Chapel

L.M.Wilson

Res.

L.M.Wilson

Mrs.S.Phillips

Mills.M.E.Ch.

Mrs.Mills

H.Waller

Res.

R.Venables

C.Goslee

Jno.Hughes

Est.of P.D.Weatherly

A.E.Acworth

Res.

Store

H.Quinton

Mrs.A.Dashiell

Res.

Wm.Howard

J.B.Taylor

S.D.Mills

L.M.Wilson

372

S.Mills

E.Elliott

P.H.Waller

O.Dashiell

H.Taylor

Wm.F.Wilson

C.Roberts

D.Hearn

F.A.Hatton

W.Bacon

Res.

Dr.W.C.Marsters

N.Mezick

Res.

S.Cooper

Wm.Howard

Res.

J.H.Phillips

Res.

J.W.Phillips

A.Covington

M.Polk

Geo.Waller

Carriage Sh.

T.Elliott

F.Hatton

Wm.Bacon

310

R.D.Robertson

J.Gilliss

T.Hitch

Thos.B.Freeney

T.C.Calloway

Jno.H.Brown

Wm.Howard

R.L.Wilson

Geo.Waller

Spring Hill E.Ch.

W.Burkhead

Lloyd

School House

Mrs.Acworth

T.Langsdale

A.J.Crawford

Est.of Thos.Bennett

J.A.Richards

T.Gilliss

Res.

Burkhead & Toadvine

School N°6

Seabreeze

Mrs.Acworth

P.H.Waller

Miss Crawford

Wm.Howard Cordy & Phillips S.Mill

Donohoe

Bapt.Ch.

332

H.J.Langsdale

T.J.Langsdale

Res.

G.Mill

Creek

Bounds & Langsdale Jas.R.Bounds

WI-6
Spring Hill Church
Hebron vicinity

Lake, Griffing, and Stevenson Atlas
1877

Hebron

(BM 43)

CONRAIL

Creek

Rockawalking

WI-6
Spring Hill Church
Hebron vicinity

Salisbury, Maryland Quadrangle
1942

Rockawalking

Creek

CONRAIL

BM 44

BM 42

347

40' '42 430 000 FEET (DEL.) '43

INTERIOR—GEOLOGICAL SURVEY RESTON VIRGINIA—1983

45 000mE

4000

W1 — Spring Hill Church (St. Paul's)   W1 - 6

MDB 1968

Springhill Church – (St Paul's) – Wi   WI – 6

MoB 1968